

7170 | JOG LEVER



Putting you in control.

The Kobelt 7170 jog lever is used for jog or back-up steering control over power steering systems. Equipped with high current microswitches, this device provides single speed, non follow up jog control directly over the vessel's steering valve or as an input to a digital controller.

Constructed of robust bronze and stainless steel, this device can be installed at any location on the vessel and will provide a long service life in all marine environments. The 7170 comes in a combined black and polished chrome finish.

Specifications

Handle Travel:	14° (per direction)
Operating Force:	3 lbs [13 N]
Electrical Contacts:	1 Form A, Normally Open (per direction)
Maximum Voltage:	250 VAC / 24 VDC
Maximum Current: ¹	12 VDC: 6A / 24 VDC: 5A / 250 VAC: 6A
Connection:	80 in [2m] pigtail, 18 AWG [0.75 mm ²]
EMC emissions:	per DNV standard No.2.4
EMC immunity:	per DNV standard No.2.4
Operating Temperature:	-13°F ... 158°F [-25°C ... 70°C]
Environmental Conditions:	per DNV standard No.2.4
Vibration Resistance:	0.7 g
Finish:	Polyester powder coat Textured black
Product Weight:	2.1 lbs [1.0 kg]
Approvals	ABS (20-2067473-PDA)

Key Benefits



- ABS type approved
- Lab tested to meet DNV standards
- Water-tight, corrosion resistant design
- Spring centered
- Bronze and stainless steel construction

Notes:


1) Maximum current is for an inductive load.
Current is per switch contact.

SPECIFICATIONS

General Arrangement

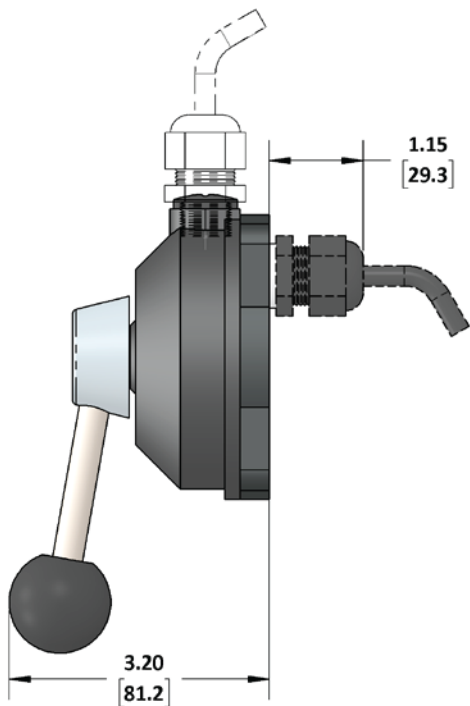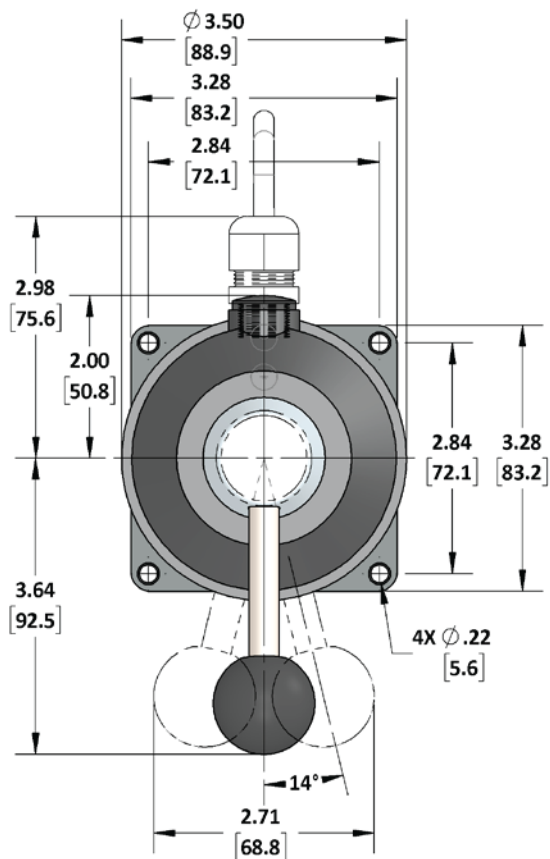

Model Code Key



Gland Exit Location

1 = Top

2 = Back


Finish Type

A = Black Body and Chrome Hub

B = Black Body and Black Hub

C = Chrome Body and Chrome Hub

Wiring Diagram

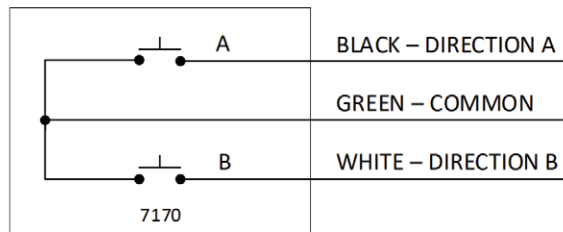

Mounting Dimensions

